

528,624

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau




(43) International Publication Date
8 April 2004 (08.04.2004)

PCT

(10) International Publication Number
WO 2004/028741 A1

- (51) International Patent Classification⁷: **B23Q 5/50**, H01L 41/09, B23Q 1/34
- (21) International Application Number: **PCT/IB2003/004097**
- (22) International Filing Date:
18 September 2003 (18.09.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
02078972.3 25 September 2002 (25.09.2002) EP
- (71) Applicant (for all designated States except US): **KONINKLIJKE PHILIPS ELECTRONICS N.V.** [NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **ROSMALLEN, Gerard, E.** [NL/NL]; c/o Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL). **OPHEY, Willem, G.** [NL/NL]; c/o Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).
- (54) Title: **DRIVING APPARATUS, USE THEREOF AND AN OPTICAL SYSTEM COMPRISING SUCH APPARATUS**
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:
— with international search report
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

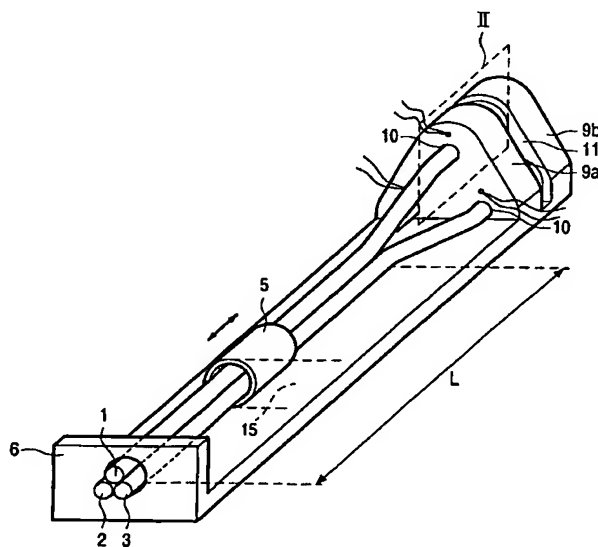

(57) **Abstract**—Driving apparatus, comprising at least two driving members (1, 2, 3, 4) and at least one driven member (5), wherein each of the at least two driving members are frictionally engaged to the at least one driven member (5) to move said driven member (5), wherein the friction between each driven member (5) and each driving member (1, 2, 3, 4) is such that the driven member moves when over half of the driving members (1, 2, 3, 4) being in frictional engagement with said driven member are moved simultaneously between a first and a second position, wherein the friction between each driven member (5) and each driving member (1, 2, 3, 4) is such that the driven member (5) substantially remains stationary when less than half of the driving members (1, 2, 3, 4) being in frictional engagement with said driven member is moved.

WO 2004/028741 A1